



ALLEGION™

REGIONAL SERVICE CENTER

Atlanta Regional Service Center

Conduit Installation in Frames



We're wired to meet your conduit needs

Exclusively available at the Republic Regional Service Center in Atlanta, frames & elevations can now be ordered with preinstalled conduit.

Our team of service center experts will install conduit to your specifications and ship direct to jobsite, ready for installation.

Configuration Components

Conduit Run

- Conduit & straight junction box connector
- Connecting conduit to junction box

Elbow Run

- Conduit & 90° elbow connector
- For 90° changes in direction

T Run

- Conduit & T connector
- Combines two separate runs

Any of the above options can be used alone or in combination to meet a variety of configuration needs

Features

- ¾" EMT (Electrical Metallic Tubing)
- To be used for low voltage applications (12 and 24 volts) hardware
- Offered on both welded and KD frames and elevations

Certifications

- UL Fire Label available
 - Confirm with local AHJ for final approval


Ordering

- Conduit layout drawings should be provided with order
- Order to be placed with Atlanta Republic Service Center

Offering & Pricing

Conduit Request	Description	List Price
Conduit Run	Conduit & Junction Box Connector	\$160
Elbow Run	Conduit & 90° Elbow Connector	\$192
T Run	Conduit & "T" Connector	\$233
Multi-Conduit Prep	Drilled prep to pass conduit through mullion	\$33

Republic Part #	Description	List Price
3981412	Junction box connector (3/4" EMT)	\$19
3981414	Elbow connector (3/4" EMT)	\$43
3981413	T connector (3/4" EMT)	\$64
3981416	3/4" Conduit (EMT) - 10' stick	\$68

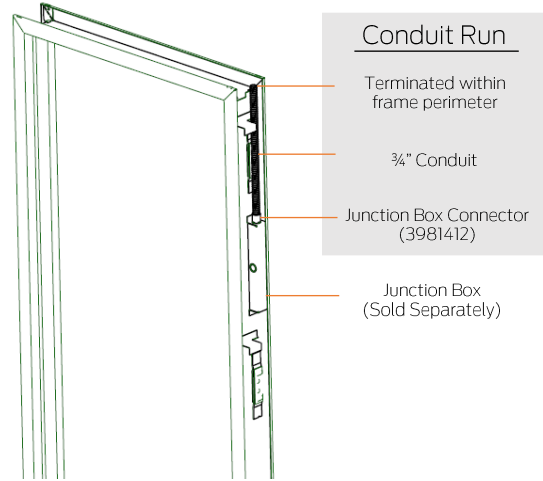

Ordering

- Conduit layout drawings should be provided with request/order.
- Conduit, Elbow, and "T" Runs priced for up to 5' lengths.
- Junction boxes are required (some exceptions with elevations) and sold separately with hardware preparations.
- Hardware preparations are not included, pricing found on Service Center Modification Menu.
- Elevations should be welded at time of conduit install to ensure properly prepared for conduit prior to welding.
- Long runs may be tack welded to frame (and sprayed with primer) for stability in shipping
- All conduit runs will be (unless otherwise specified)
 - Directed to the ceiling
 - Terminated inside the Frame profile (not extended beyond Frame perimeter) to reduce risk of damage in shipping.
 - Conduit will terminate approximately 3/4" beyond rabbet in head.
- Anchor Limits – Not compatible with Masonry T anchors
- Place orders via Atlanta Regional Service Center
 - Republic.Atlanta@allegion.com
- Customer regional center discount applies or valid product quote.

Your Regional Service Center Team

Atlanta Regional Service Center
 Main: (678)433-1061
 Fax: (678)433-1065

Steve Puleo
 Hollow Metal Sales Specialist – FL, SC, NC, VA
 Steven.Puleo@allegion.com

Atlanta Regional Sales Office
 (678)906-2103

Charlotte Regional Sales Office
 (704)417-5400

Danny Frye
 Service Center Representative
 Danny.Frye@allegion.com

Steven Hugueley
 Hollow Metal Sales Specialist – GA, TN, AL
 Steven.Hugueley@allegion.com

Erv Sherer
 Area Project Sales Manager - Atlanta
 Erv.Sherer@allegion.com

Sam Settle
 Area Project Sales Manager - Charlotte
 Sam.Settle@allegion.com

About Allegion

Allegion (NYSE: ALLE) is a global pioneer in safety and security, with leading brands like CISA®, Interflex®, LCN®, Schlage®, SimonsVoss® and Von Duprin®. Focusing on security around the door and adjacent areas, Allegion produces a range of solutions for homes, businesses, schools and other institutions. Allegion is a \$2 billion company, with products sold in almost 130 countries. For more, visit www.allegion.com.

