



1 3/8 DM SERIES DOORS

TOP TO TOP
3 1/2" Hinges Only
1 3/8" Door
NOMINAL DOOR WIDTH
NET DOOR WIDTH

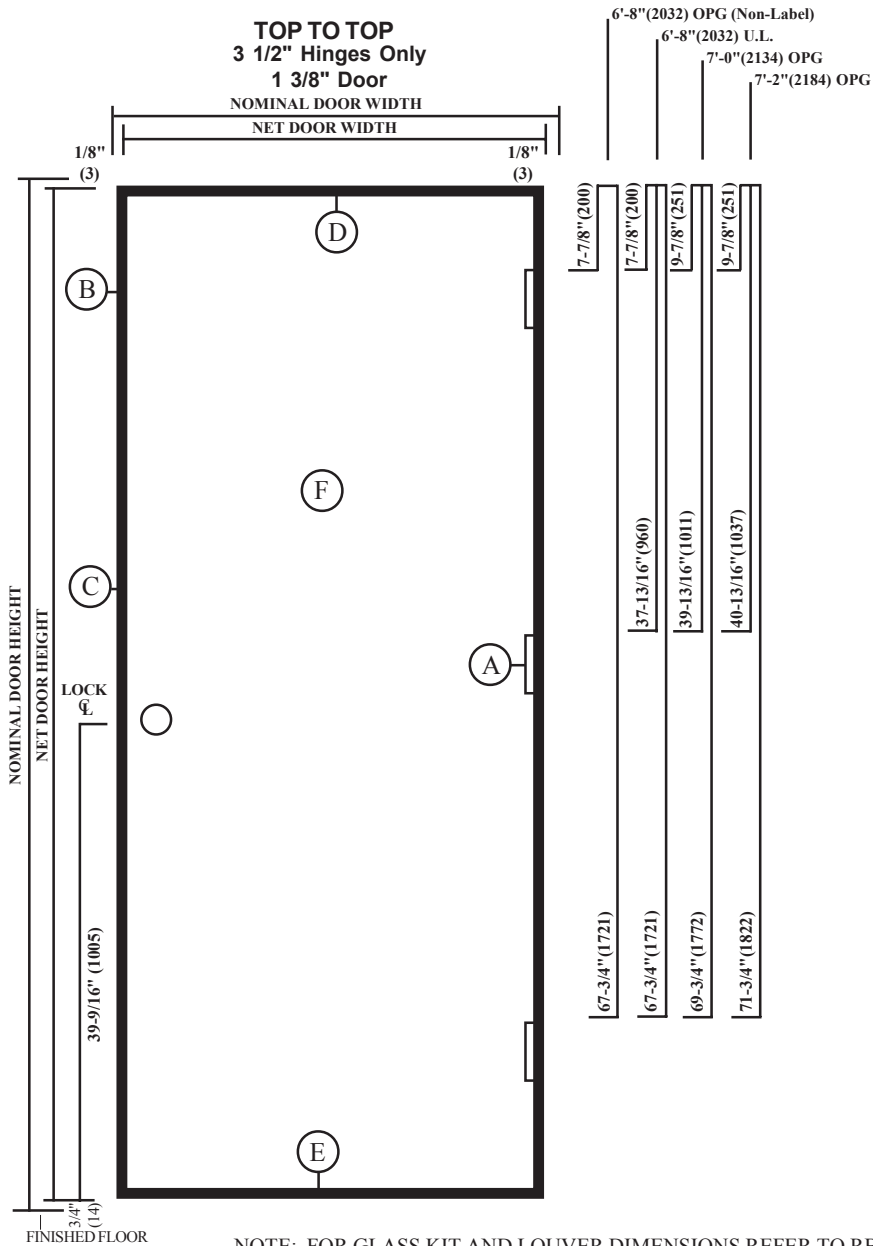

NOTE: FOR GLASS KIT AND LOUVER DIMENSIONS REFER TO RBP 92-Q


A



CONTINUOUS 16 GAGE STEEL CHANNEL WITH INTEGRAL 1 1/2" (38) THICK HINGE REINFORCEMENT WITH PROVISION FOR 3 1/2" (89) x 3 1/2" (89) FULL MORTISE TYPE HINGES.


B

CONTINUOUSLY WELDED EDGE SEAM



3/4" (14) CELL HONEY COMB CORE


C



16 GAGE STEEL CYLINDRICAL LOCK REINFORCEMENT WITH PROVISIONS FOR GOV'T SERIES 160 OR 161 CYLINDRICAL LOCKSETS {2 3/4" (70) BACKSET} AND ANSI A115.2 LOCK FRONT {1 1/8" (29) x 2 1/4" (57)}

D

FLUSH TOP CONTINUOUS 16 GAGE STEEL CHANNEL




STEEL PANEL

Dimensions in () are metric

E

DOOR BOTTOM




CONTINUOUS 16 GAGE STEEL CHANNEL

F




14 GAGE ASTRAGAL FOR DOUBLE DOORS

"FRAME & GLASS SUPPORTS" must be used for proper installation



ORDER SIZE = INSIDE DIMENSION OF FRAME
 CUT OUT SIZE = ORDER SIZE + 1 1/2" (38) - 1 5/8" (41)
 GLASS SIZE = ORDER SIZE + 3/4" (14)

1/4" (6) GLASS ONLY



PROJECT



DATE

DRAWN BY

REVISION

SHEET

OF